




ROTAJET DEGREASING MACHINERY

Multi-Stage Wash + Dry

For a complete surface clean

The multi-stage spray washers offer an additional step to thoroughly **RINSE AND DRY** the washed parts.

This additional drying stage ensures that the surface of the material is completely free from any remaining residue that collects into any fines lines or sits on the metals surface causing surface stains.



RJA-FL2500

Applications


- To wash motor blocks and parts
- To wash any parts at bus, truck, automobile and work machines
- At the workshop which manufacture machining parts and oiled part
- At the firms which engine reconditioning and cylinder head repairing

Features:

- Completely manufactured with stainless steel sheets and components
- Cleaning process timing
- Developed for minimum water, detergent and electric consumption
- Minimum water consumptions by closed water cycling system.
- Heated water (solution) dispensed through high-pressure jet nozzles
- Pneumatic front door movement
- High user safety with pneumatic pistons
- Gear driven rotary table
- Automatic water feeding system


RJA-FL1500





ROTAJET DEGREASING MACHINERY

Multi Spray Wash + Dry

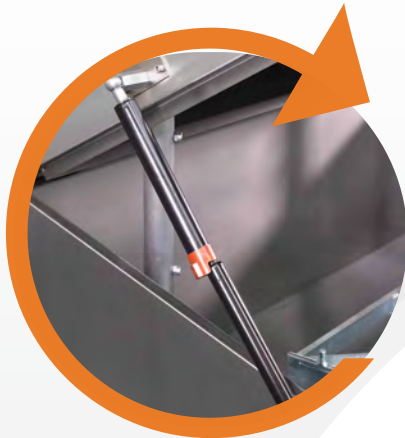


Safety Interlocks

Safety interlocks are automatically engaged during the operation of the machine and are only disengaged when the cycle has come to an end and temperatures have returned to a safe level.



Integrated control measures

We put all the measures in place to so your products are cleaned thoroughly, whilst ensuring the safety of the operator and the longevity of your machine.

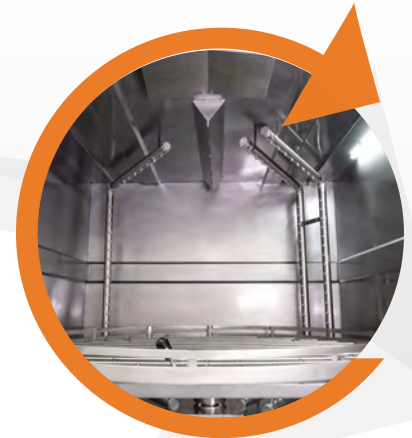

Standard sizes


To account for our customers' varying needs, we have produced standardised sizes for our front loading spray washers which are perfect for the majority of degreasing applications. Find the specs below.

MODEL	RJ-Multi1250	RJ-Multi1500
Basket diameter	1150	1350
Loading height (mm)	600	700
Loading capacity (kg)	450	650
Tank capacity (Lt)	250	400
Pump Pressure (bar)	2.5	2.5
Pump quantity and Power	3 pcs x 3,0 Hp	3 pcs x 3,0 Hp
Heater (kW)	15	15
Electricity (V/phrse/Hz)	220-380-415/ 1-3/ 50-60	220-380-415/ 1-3/ 50-60
Process timer (min)	0-90	0-90
Working Temp(°C)	0-80	0-80
Rotary Basket	Standard	Standard
Oil Skimmer	Standard	Standard
Packing size and weight	2060-1750-1940 600kg	2000-2360-2450 750kg



info@rotajet.co.uk
rotajetsystems.co.uk
14 Flanshaw Way, Wakefield
WF2 9LP

MULTI-STAGE WASH + DRY



ROTAJET DEGREASING MACHINERY

Multi Spray Wash + Dry

Optional Extras:

- Drying Unit
- Safety light barrier
- Automatic basket loading system
- Steam extraction
- PLC control and touch-screen

MODEL	RJ-Multi1750	RJ-Multi2000
Basket diameter	1600	1850
Loading height (mm)	800	900
Loading capacity (kg)	750	850
Tank capacity (Lt)	400	450
Pump Pressure (bar)	2,5	2,5
Pump quantity and Power	3 pcs x 3,0 Hp	4 pcs x 3 Hp
Heater (kW)	15	22,5
Electricity (V/phrase/Hz)	220-380-412/ 1-3/ 50-60	220-380-412/ 1-3/ 50-60
Process timer (min)	0-90	0-90
Working Temp(°C)	0-80	0-80
Rotary Basket	Standard	Standard
Oil Skimmer	Standard	Standard
Packing size and weight (mm)	2930 x 2040 x 2590 1100kg	3070 x 2250 x 3740- 950kg



info@rotajet.co.uk
rotajetsystems.co.uk
14 Flanshaw Way, Wakefield
WF2 9LP

MULTI-STAGE WASH + DRY